# EVERBEING INT'L CORP.

### Your Partner in Probing Solutions



EB PCB Probe Station

The EB PCB Probe Station combines mechanical expertise from our flagship probe station and broadens the test parameters to large scale devices such as PCB's and LCD panels

#### **Features**

- Large Gantry Support for fully free X and Y direction setup to probe all areas of your board
- Simplistic setup for all probing applications
- Upper and Lower Level Gantry available for simultaneous underside probing
- Micropositioners with 1 μm Stepping Resolution
- Support for mmW frequency extenders
- Mounting Up to 8 Micropositioners
- Anti-Vibration Table Included
- Microscope Gantry include for large movement X and Y

#### **Applications**

- Basic IV/CV
- RF, Single Broadband Probing
- Antenna Probing

#### **Accessories**

- Customized Sample Holder






## EB PCB PROBE STATION


### Your Partner in Probing Solutions

### **Station Specifications**

Station Footprint	1600 mm W x 1300 mm D
Station Height	1300 mm Including Microscope
Station Weight	600 kg
Anti-Vibration Table Stability	Dissipation of 1 μm
Platen (Micropositioner Platform) X Travel	600 mm / ± 300 mm
Platen (Micropositioner Platform) Y Travel	450 mm / ± 225 mm
Number of Platen X Rail	2
Number of Platen Y Rail	2
Sample Holder Size	600 mm W x 450 mm D
Micropositioner Capacity	Up to 8
Micropositioner Mount Type	Screw Bolt
Micropositioner Travel Range	25 mm all X-Y-Z Linear
Micropositioner Theta Range	±5° (RF Only)
Micropositioner Resolution	1 μm Linear, 0.01˚ Theta
Electrical Connection (DC)	Triaxial (Banana as Option)
Electrical Connection (RF)	SMA / 3.5 mm / 2.92 mm
Electrical Connection (mmW)	Waveguide or 1.0 mm Coaxial
mmW Frequency Extender Support	R&S, VDI, Keysight, OML, Anritsu
Microscope Gantry X Travel	600 mm
Microscope Gantry Y Travel	450 mm
Microscope Stage	High Precision Linear Stage
Microscope Stage Travel Range	50 mm X-Y Linear
Microscope Stage Resolution	1 μm
Microscope Zoom Range	1.4x - 9.0x
Microscope Eyepiece	20x
Microscope Magnification Range	28x - 180x
Microscope Working Distance	103 mm

Note: All PCB probe station are custom sized. Images in this catalogue are based on 600 mm x 450 mm sample







# **EB PCB PROBE STATION**


#### Station Breakdown

Microscope Gantry X: Rail for quick adjustment of microscope in X direction

Microscope Gantry Y Rail for quick adjustment of microscope in Y direction

Vibration Free Table Vibration dampening integrated to maintain probing and measurement integrity

Caster Wheels Allows easy movement of entire station to relocate if necessary

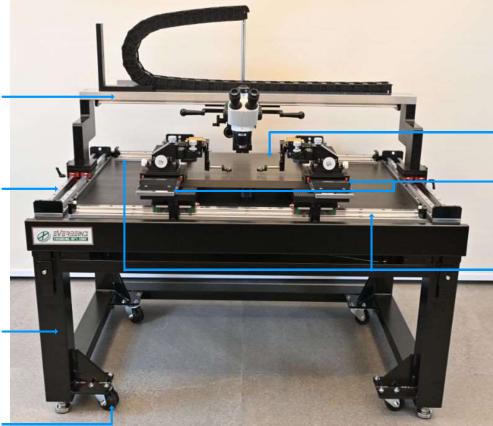

Sample Holder

Platen Y Direction Rail for quick adjustment of micropositioner in Y direction. There are two separate rails on left and

right side

Platen X Direction Rail for quick adjustment of

micropositioner in X direction. The pairs of Y direction rails slide on the pair of X direction rails ensuring linearity



## **EB PCB PROBE STATION**

### Gallery



PCB probe station for use with mmW capability





PCB probe station for use with mmW capability with double side probing feature (open section for sample)

### SSC 西華産業株式會社

東京都千代田区丸の内3-3-1新東京ビル3F 西華産業株式会社 電子機器部 当製品担当窓口/森本

TEL: +81-3-5221-7112 morimotoy@jp.seika.com https://www.seika.com/

